


S/TONES

d i s t r i b u t e d b y 14oraitaliana

grau




**COLORI
FORMATI PAVIMENTO E SPESSORE**

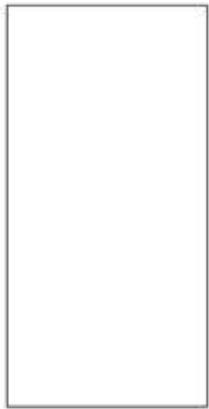

37,5x75 cm
15"x30"



75x75 cm
30"x30"

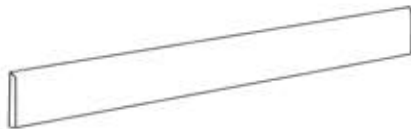

battiscopa 9x75 cm
3,6"x30"



esagona 30x35 cm
11,8"x13,8"



Grau



Grafit



Braun



Quarz

ESAGONA

ELLE DECOR



Grau



Grafit



Braun



Quarz

ESAGONA



Grau



Grafit



Braun



Quarz



Mix



grafit grau quarz 75x75 cm 37,5x75 30"x30" 15"x30"



quarz 75x75 cm 30"x30"



quarz 75x75 cm 30"x30"



quarz 37,5x75 cm 15"x30"



braun 75x75 cm 30"x30"



braun 75x75 cm 30"x30"



braun 75x75 cm 30"x30"



esagona braun 30x35 cm 11,8"x13,8"



grau 75x75 cm 30"x30"



grau 75x75 cm 30"x30"



grau 37,5x75 cm 15"x30"



esagona grau 30x35 cm 11,8"x13,8"

S/TONES

d i s t r i b u t e d b y 14oraitaliana

Dati Tecnici / Technical Data

							
assorbimento d'acqua % water absorption %	resistenza alla flessione bending strength	resistenza agli sbalzi termici thermal shocks resistant	resistenza al gelo frost resistant	resistenza agli attacchi chimici resistance to chemicals	resistenza alle macchie resistance to stains	coefficiente d'attrito static coefficient of friction	resistenza all'abrasione resistance to abrasion
≤ 0.5%	> 35 N/mm ²	resistente resistant	resistente resistant	UA ULA UNA	CLASSE 5	R10 A+B	CLASSE 5 PEI 2100 GIRI
ISO 10545.3 ASTM C373	ISO 10545.4 ASTM C648	ISO 10545.9 ASTM C484	ISO 10545.12 ASTM C1026	ISO 10545.13 ASTM C650	ISO 10545.14	DIN 51130 DIN 51097 ASTM C1028	ISO 10545-7

14oraitaliana®

www.14oraitaliana.com