



Extra long planks
with high-end performance

XL-END

EN

FI - SE - NO - DK



YOUR CORETEC[®] FLOOR, MADE WITH CARE

We have a passion for providing a wide selection of authentic natural looks, so you can express what makes you, you. Persistent in product innovation – including micro-beveled edges, enhanced painted bevels & Embossed in Register technology – we create the most appealing designs & textures available.

When choosing a floor from this collection, you choose for a warm atmosphere and a powerful look. The exceptionally long planks are no less than **2.10 meters long** and **15 mm thick**. Thanks to the extra thick wear layer of 0.8 mm, these classy floors score excellently in terms of wear and impact resistance.

AN EXTRA THICK NATURAL BACKING

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors. And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

A natural solution that brings only benefits to your home or business:



Added sound insulation



A comfortable and warmer floor



A natural protection against mold and mildew



No need for separate underlayment



Absorbs subfloor imperfections



EXTRA LONG, EXTRA STRONG SOUND CORE® 15 mm



**Best in class
wear resistance**

Luokkansa paras kulutuskestävyys /
Klassens bästa slitstyrka / Klassens beste
slitstyrke / Klassens bedste slidstyrke



100% waterproof

100% vedenpitävä / 100% Vattentåligt /
100% Vannrett / 100% vandfast



Easy to install

Helppo asentaa / Enkelt att installera /
Lett og legge / Let at installere



Electrostatic performance

Sähköstaattinen suorituskyky / Mot
statisk elektricitet / Elektrostatisk ytelse /
Antistatisk



Extremely stable

Erittäin vakaa / Dimensionsstabil /
Ekstrem stabil / Ekstremt stabilt



Reduces noise

Vähentää melua / Minskar ljud /
Reduserer støy / Dæmper støj



**No acclimatization
necessary**

Akklimatisointia ei tarvita / Utan
aklimatisering / Ingen aklimatisering
nødvendig / Skal ikke afklimatiseres



Pet proof

Lemmikkieläinten kestävä /
Husdjurssäkert / Kjøledyr styrke /
Velegnet til kæledyr



**Installation on
any surface**

Asennus mille tahansa pinnalle /
Alla typer av underlag / Kan innstaleres
over alle typer overflate / Monteres på
enhver overflade




**Ideal for underfloor
heating & cooling**

Ihanteellinen lattialämmitykselle
ja-jäähdytykselle / Lämpligt för värmegolv
/ Ideal for gulvvarme / Ideel for gulvvarme
og gulvkøling



AN EXCLUSIVE WATERPROOF SELECTION



CHANTILLY
50 LVREXL 2599



BELVOIR
50 LVREXL 2594




MONTCLAIR
50 LVREXL 2557



EGMONT
50 LVREXL 2553



KANTARA
50 LVREXL 2515



WINDSOR
50 LVREXL 2683



FONTENEAU
50 LVREXL 2686



CHANTILLY
50 LVREXL 2599

XL-END







BELVOIR
50 LVREXL 2594

XL-END






MONTCLAIR

50 LVREXL 2557

XL-END

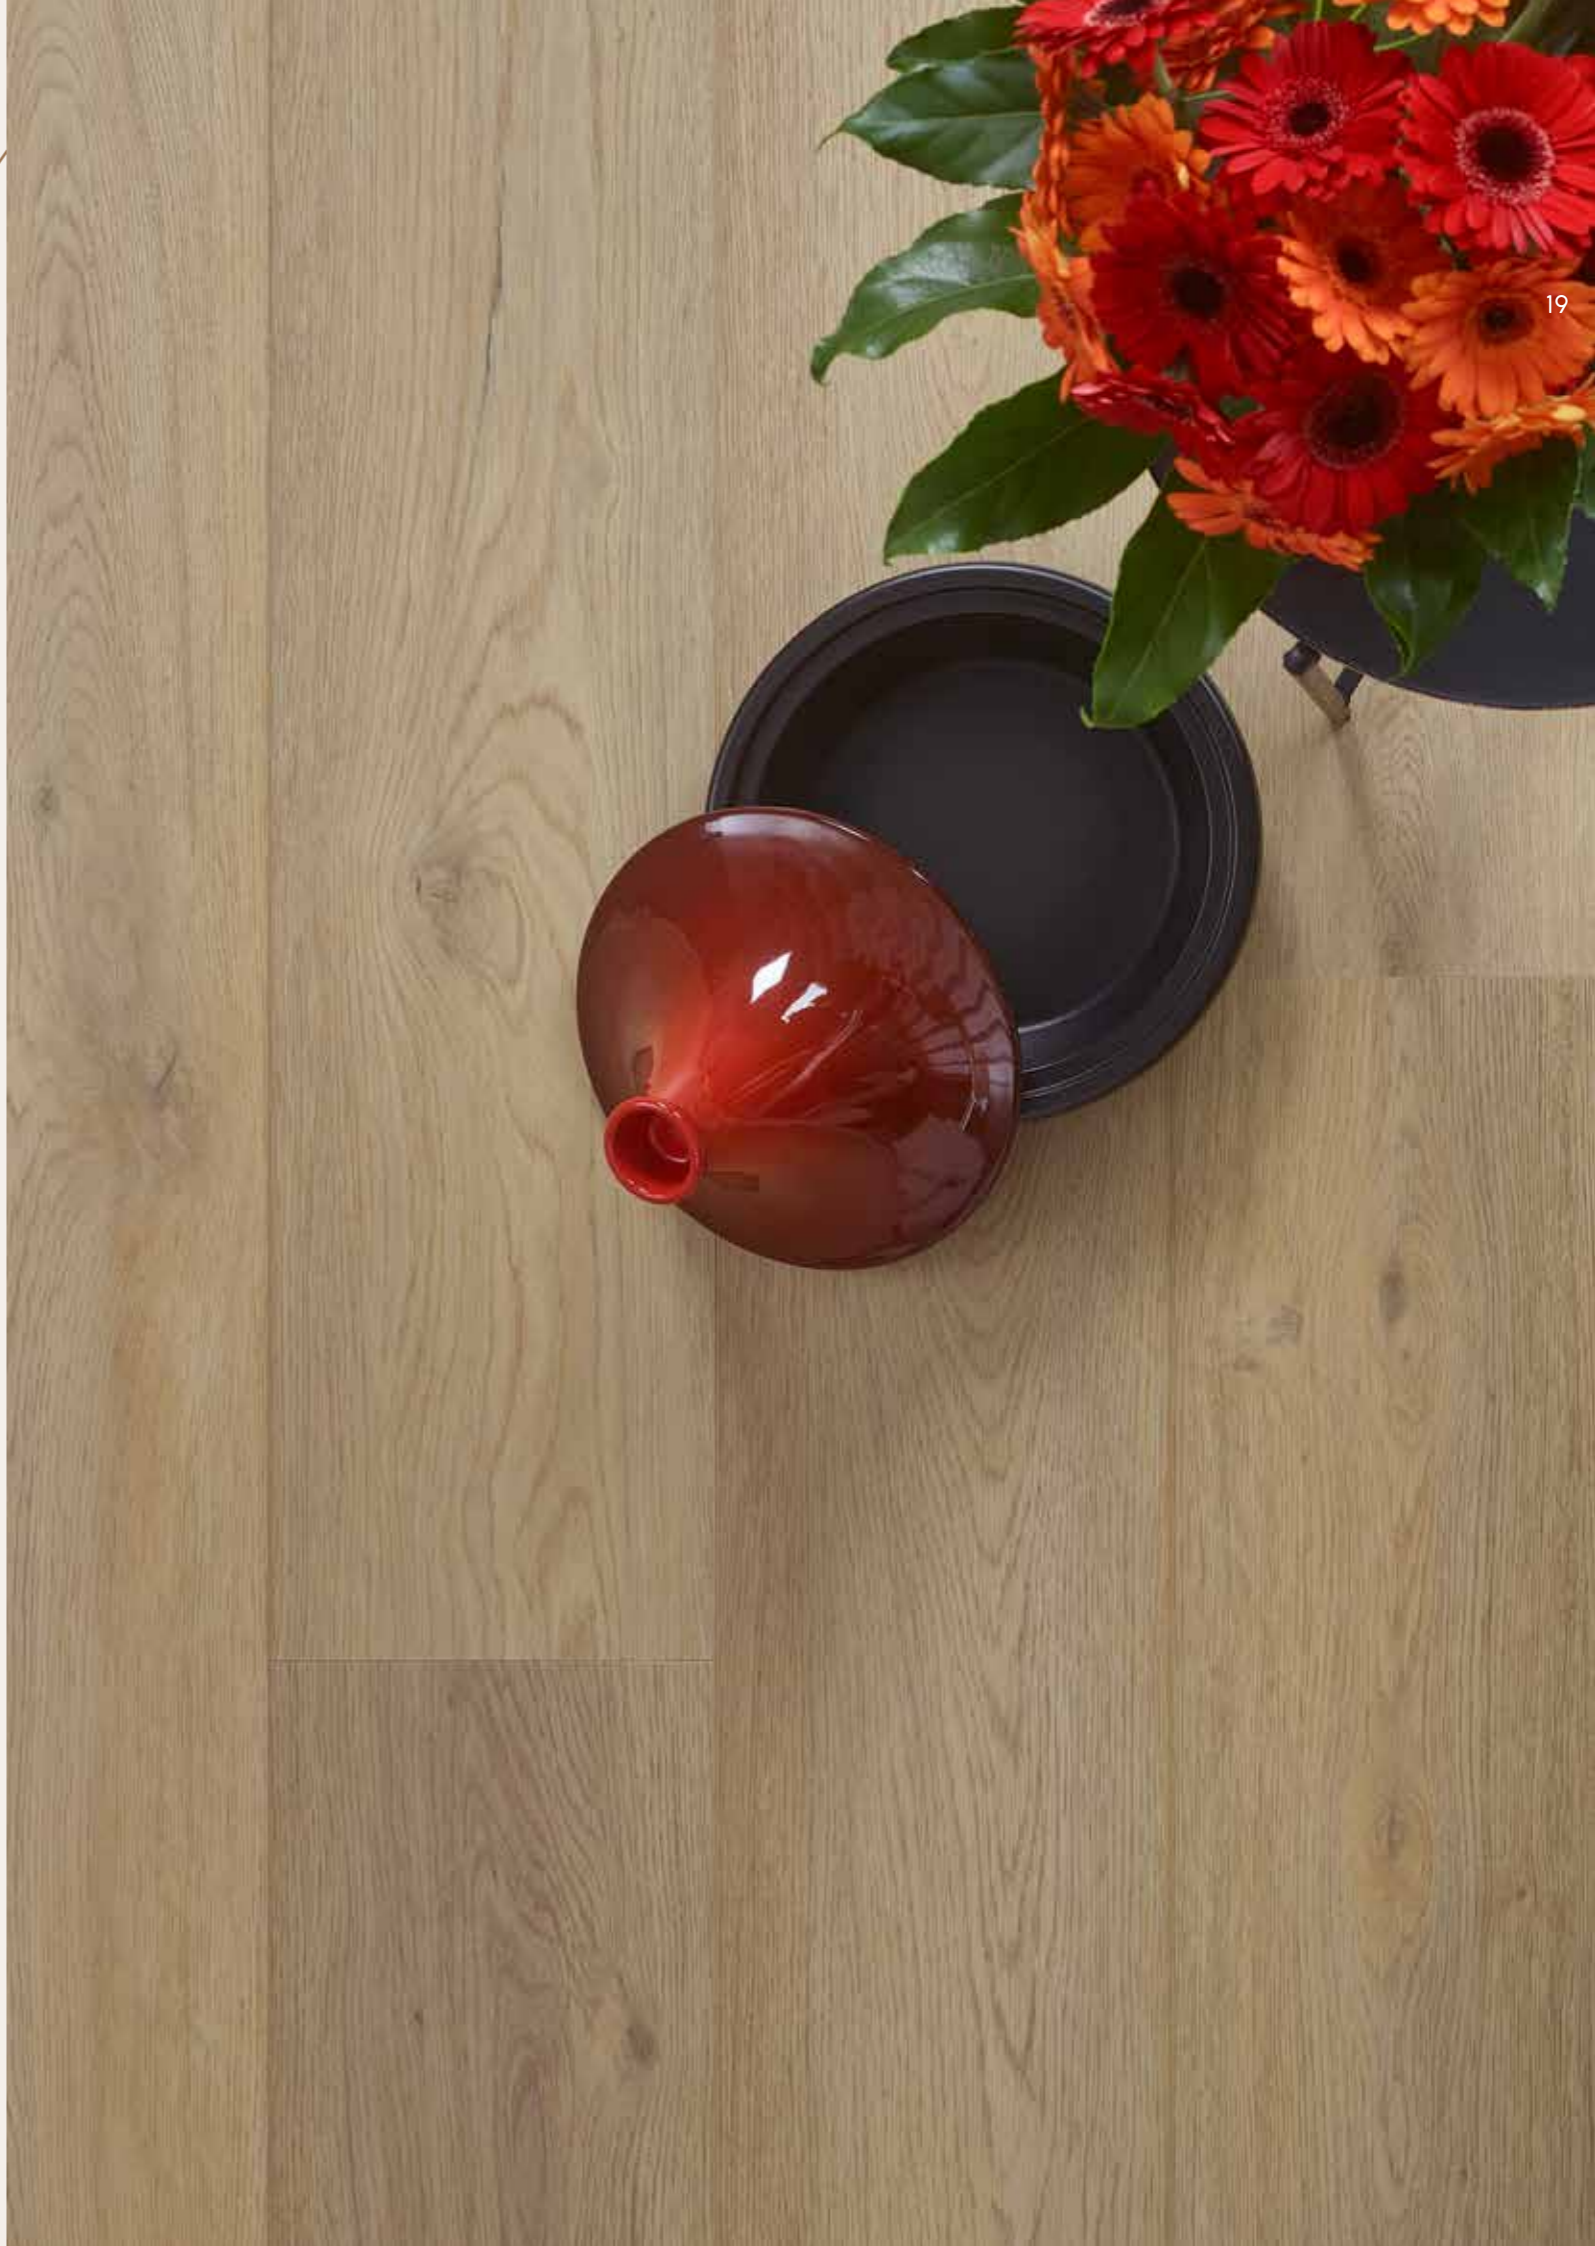





EGMONT

50 LVREXL 2553


XL-END





KANTARA
50 LVREXL 2515

XL-END

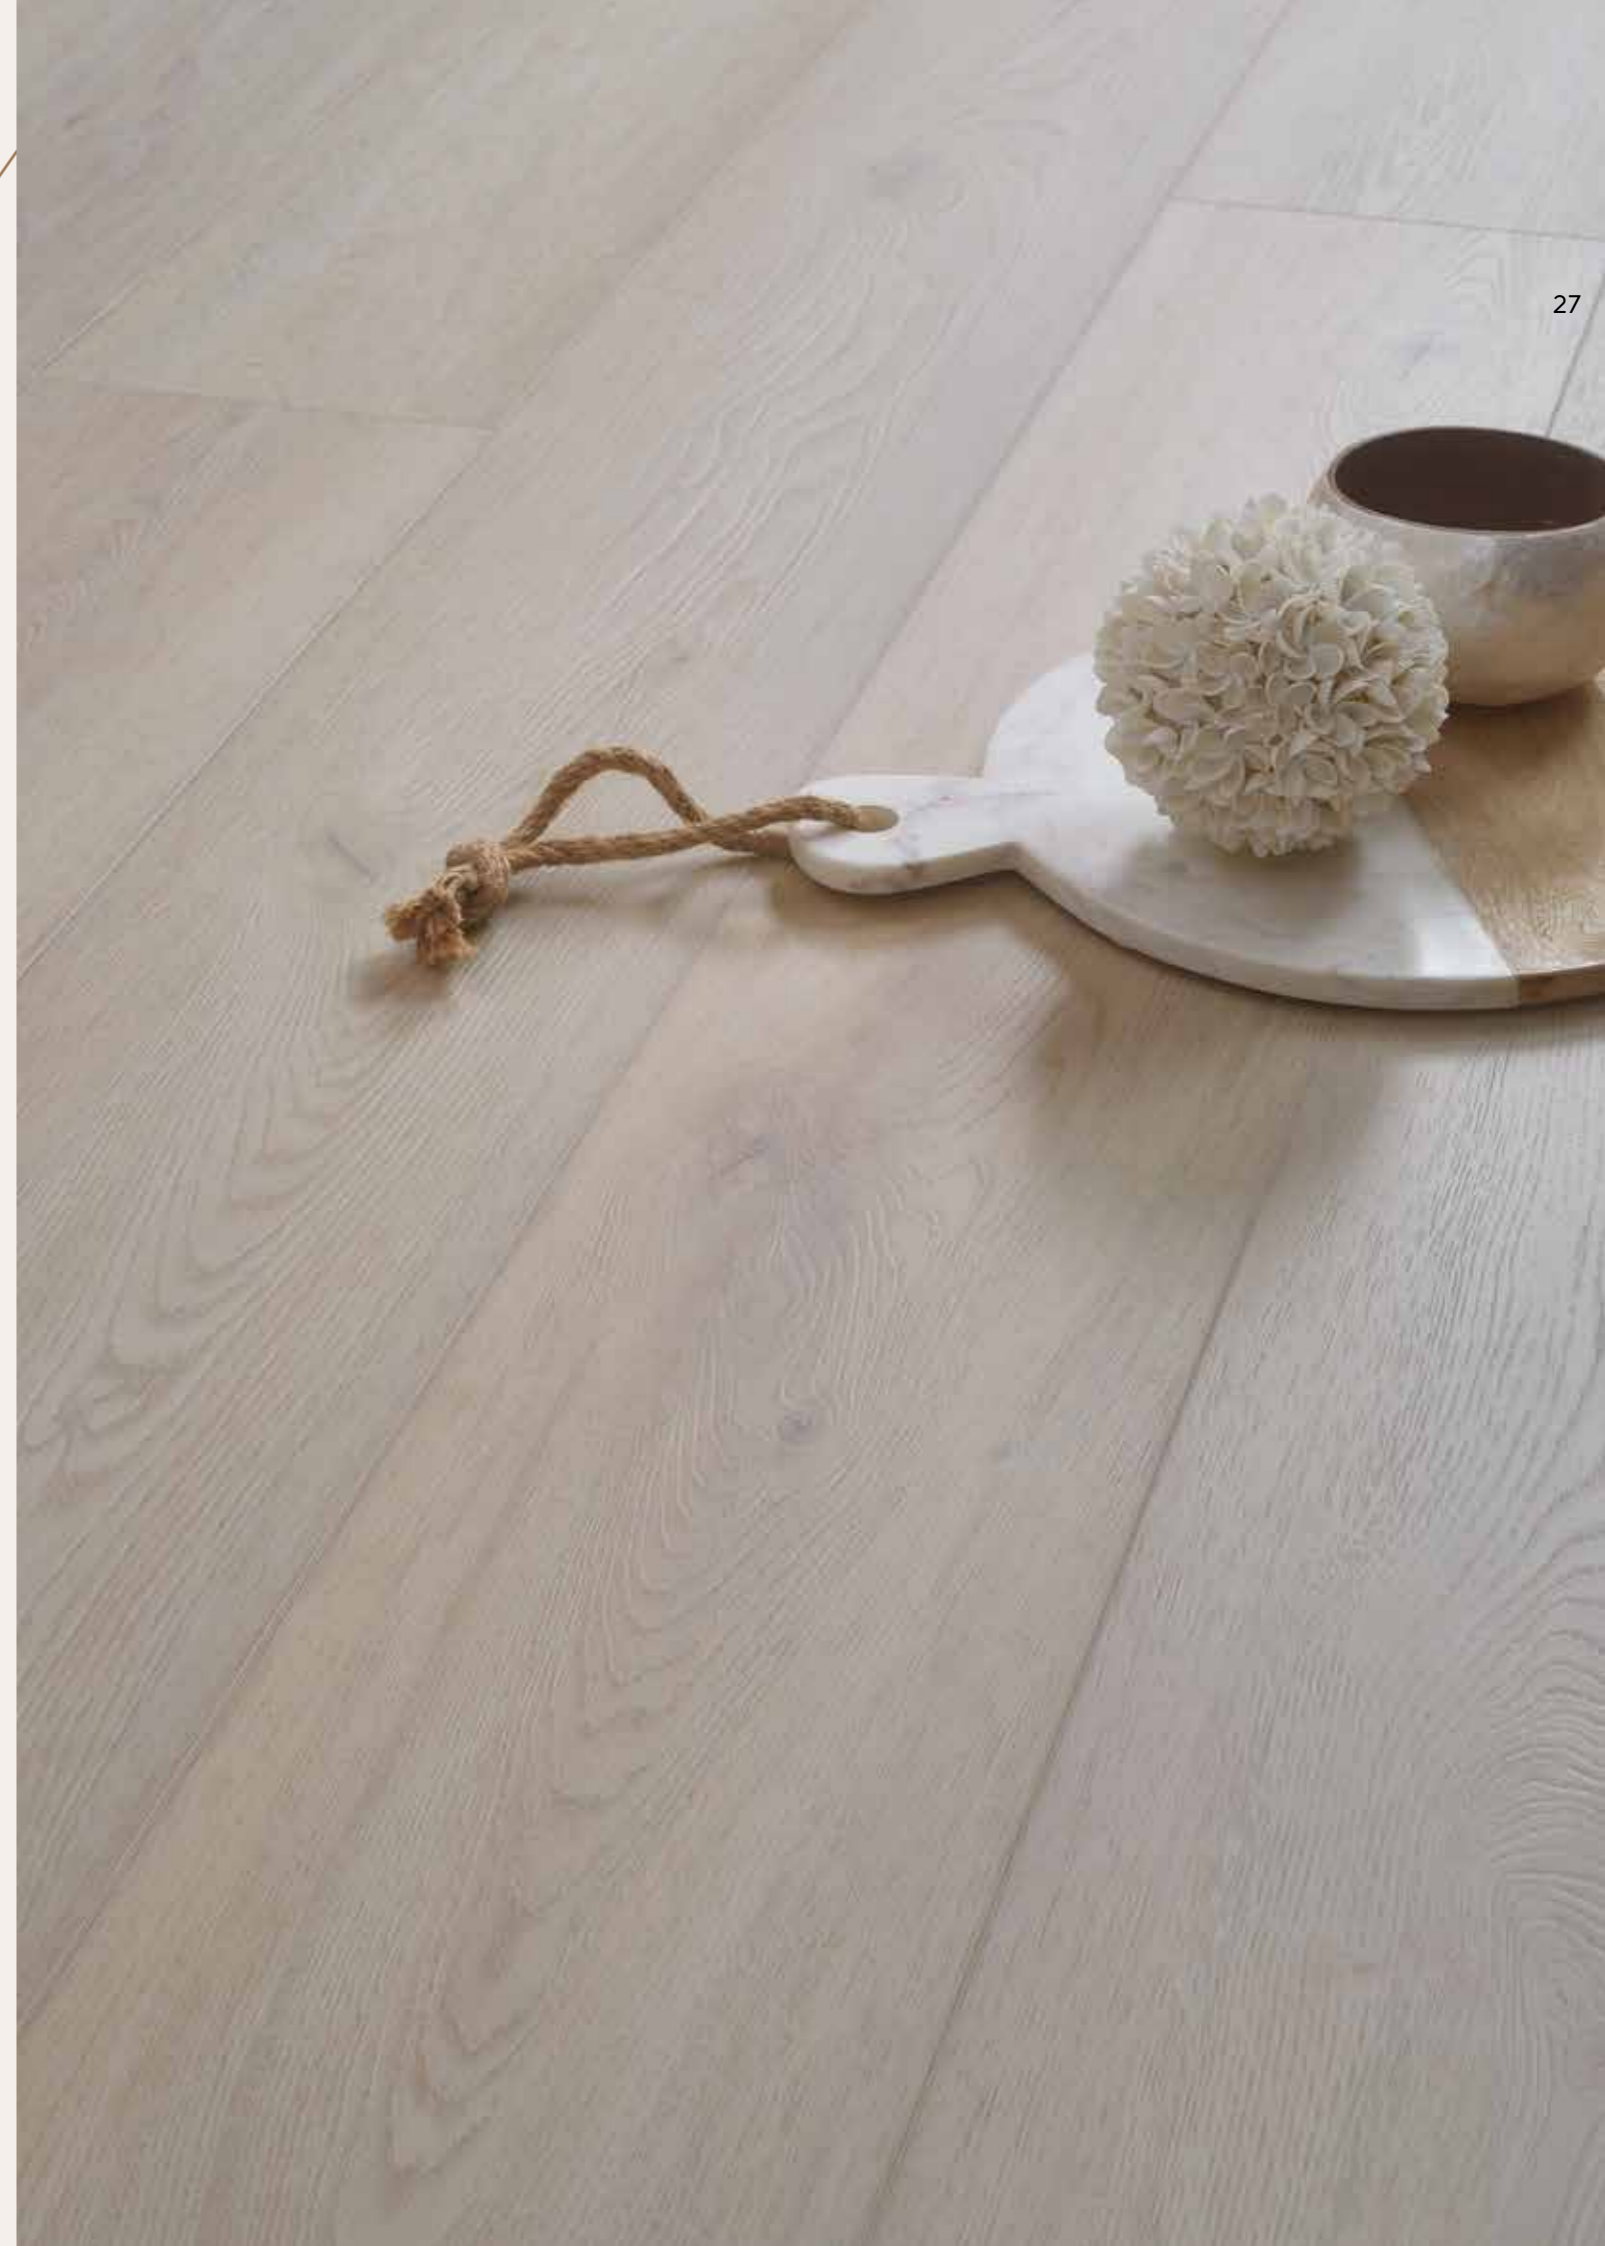





WINDSOR
50 LVREXL 2683

XL-END





FONTENEAU

50 LVREXL 2686

XL-END







Accessories

Paintable skirtings

Our paintable skirtings are 100% waterproof & shock resistant.





Matching design accessories

Our design accessories match the design of your floor & are also 100% waterproof & shock resistant.



! ... = matching design reference

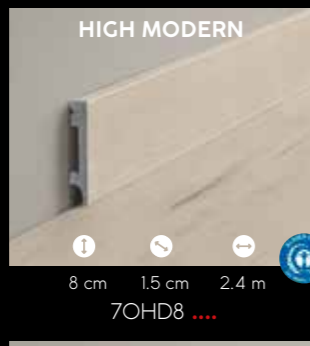


Installation

Easy installation

COREtec® floors have the easiest install on the market.

Watch our installation video on our website. www.coretecfloors.com

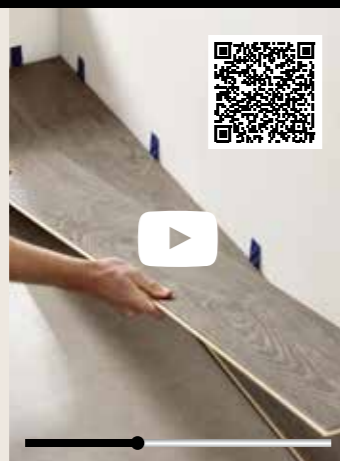

Maintenance

The COREtec® Clean, quick & green kit:

- Daily cleaner
- Deep cleaner
- Stain remover



XL-END

EASY TO INSTALL
& EFFORTLESS
MAINTENANCE



COREtec[®] floors are
that good, somebody else
can re-*enjoy* it.

At COREtec[®] Floors, we attach great importance to sustainability. Recycling our multilayer, multicomponent material has a high energy cost, which means that a circular solution with re-use of the flooring is more appropriate. That's why we come up with an environmentally friendly solution: to set up Second Life floors, based on infinite re-use, an approach which is unique in our sector.

As the architects of multilayer waterproof rigid flooring, we are the first manufacturers to set up a take-back service, giving used flooring a new lease of life. These Second Life floors will initially be offered to charitable bodies and youth organisations. Our new service also has a societal dimension, as the business we call on to clean the used flooring employs people with complex barriers to work. They will use specially developed ecologically friendly COREtec[®] products to clean the dismantled flooring, making the old flooring look as good as new.

Thanks to Second Life, your old floor gets a real second chance. And therefore you also contribute to a more sustainable world!



Technical specifications



LEVEL OF USE

Käyttöluokka / Klassificering
användningsområde / Bruksklasse / Anvendelsesgrad
Class 23 / 34 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS

Geometriset ominaisuudet / Geometrisk karakteristik /
Geometriske kjennetegn / Geometriske egenskaber
Conform (EN 17539)

WEAR RESISTANCE

Kulutuksenkesto / Slitstyrka /
Slitstyrke / Slidstærk
Pass 7000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE

Pyörällisen toimistotuolin kesto / Tålighet mot rullhjul
/ Motstandsdyktighet / Modstandsdygtighed over for
hjulstol
Pass 25 000 cycles (ISO 4918)

EFFECT OF FURNITURE LEG

Huonekalun jalkojen kesto / Verkan från möbelben /
Effekt møbelbein / Virkning af møbelben
No visible change (EN 16581)

RESIDUAL INDENTATION

Jämnöspainuma / Beständighet mot intrycksmärken
/ Motstandsdyktighet mot tryckmerker / Resterende
indtryk
≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING

Tahraantumisenkesto / Fläckbeständighet /
Motstandsdyktighet mot flekker / Modstandsdygtighed
over for pletter
5 (no visible change) (EN 438-2)

LOCKING STRENGTH

Lukituksen vahvuus / Låsingsstyrka /
Låsestabilitet / Låsingsstyrke
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY

Mittavakaus / Dimensionsstabilitet vid värmepåverkan /
Formstabilitet / Dimensionel stabilitet
Pass ≤ 0.25% (EN ISO 23999)

COLOUR FASTNESS TO LIGHT

Valonkesto / Färghärdighet / Lysfasthet /
Farveægthed over for lys
> Grade 6 (EN ISO 105-B-02)

IMPACT SOUND REDUCTION

Askeläänen parannusarvo / Ljudisolering / Akustisk
isolasjon (lydisolering) / Reduktion af stødlyd
 $\Delta L_w = 20$ dB (ISO 10140-3 / EN 717-2)

FORMALDEHYDE EMISSION CLASS

Formaldehydiluoikka / Formaldehydemission /
Formaldehyd emisjonsgruppe /
Formaldehydemissionsklasse
E1 (EN 717-1)

FIRE CLASSIFICATION

Paloluokka / Flamsäkerhet / Brannklasse /
Brandklassificering
Bfl - S1 (EN 13501)

SLIP RESISTANCE

Kitka / Halksäkerhet / Sklimotstand / Skridsikkerhed
DS - R10 (EN 13893 - DIN 51130)

UNDERFLOOR HEATING

Lattialämmitys / Värmegolv / Gulvvarme / Gulvvarme
Suitable (see: Underfloor Heating Guidelines)

ELECTROSTATIC PERFORMANCE

Sähköstaattinen varautuminen / Prestanda
statisk elektricitet / Elektrostatisk ytelse (antistatisk) /
Elektrostatisk ydeevne
≤ 5 kV (EN 1815)

THERMAL RESISTANCE

Lämmönvastus / Värmemotstånd / Varmebestandighet
/ Termisk modstandsdygtighed
0.1099 m²-K/W (EN 12667)



COREtec®, the natural choice




Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.

Takuu (vuosi) Takuu kattaa valmistusvirheet ja normaalista käytöstä johtuvan pinnan puhkikulumisen.

Garanti (år) Garantien gæller tillverkningsfeil og for tidlig utslitning ved normalt anvendende.

Garanti (år) Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.



Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be · www.coretecfloors.com