



FS Star LT

SINGLE FIRED FLOOR TILES



FS Star LT Blue




FS Star LT White

FS Star LT

SINGLE FIRED FLOOR TILES



FS Star LT Sage




FS Star LT

SINGLE FIRED FLOOR TILES

FS STAR LT Sage



FS STAR LT Black

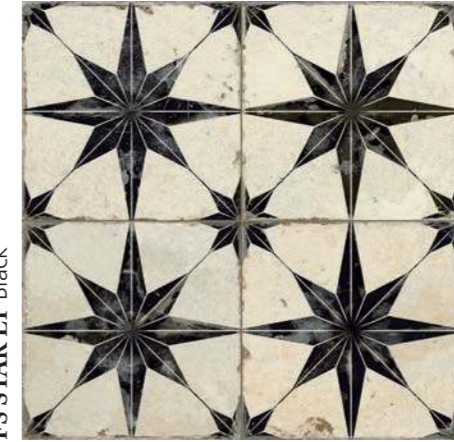


FS STAR LT Blue



FS STAR LT White




FS STAR LT



45 * 45 * 1,05 cm
18 * 18"

NO RECTIFIED	LAYER TECH
	BN17
BLACK	32447
BLUE	32448
SAGE	32449
WHITE	33214



Rodapie - Skirting (R. FS 0)
8 * 45 cm | 3 * 18" P8

CARACTERÍSTICAS TÉCNICAS | TECHNICAL CHARACTERISTICS

joint	versatile	matt/gloss	diferent shades	shade variation	various graphics

CARACTERÍSTICAS TÉCNICAS ANTIDESLIZAMIENTO | ANTI-SLIP CHARACTERISTICS

Ensayo Essay	Características Features	Resultado Result
		LAYER TECH
DIN 51130	Ángulo crítico (Pies calzados) Critical angle (footwear)	R10
BS 7976-2	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test-PTV)	+36 Wet
UNE 41901 EX	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test)	Class 2
ANSI A.1371	Coefficiente de Fricción Dinámico Dynamic Coefficient of Friction (DCOF)	>0,42



FS Star LT Black

FS Star LT

SINGLE FIRED FLOOR TILES