







From one true original to another, It's a family affair!



The real values in life are those created and found within families; authenticity, trust and the opportunity given to be creative and express yourself. These same values drive our company and they define our corporate culture.

We saw an opportunity to create a better floor. We chased a dream and created a whole new category along the way. As the innovators of COREtec®, the Original, 100% waterproof floor, we did just that. Stylish, strong floors that sustain real family lives full of entertaining, kids and pets.

"Click, lock, enjoy. It is as simple as that!"

It all began as an entrepreneurial business in 2001, within our founder's heart and spare bedroom as our "headquarters". With the invention of COREtec®, the original, patented, 100% waterproof floor in 2013, we grew rapidly to become the leading brand of these unique and highly innovative products. We launched our European division in 2016 and that same year were acquired and embraced into the family of Shaw Floors, an industry leader and subsidiary of Berkshire Hathaway, led by the world-renowned investor, Warren Buffett.

We've come a long way from where we started to where we are now. But those family values guide us still. Led by management and embraced by every employee, dealer, and partner, we are recognized as the problem-solvers, innovators and design enthusiasts. Today we offer an incredible range of resilient, durable floors that can be purchased, installed and lived upon in one single day. Click, lock, enjoy. It is as simple as that!

The most difficult task will be to choose from our wide variety of life-like decors. But don't worry, you are sure to find one to match your style because we have a floor for every personality.

Welcome to our family, We promise to remain authentic to the core **What's in your core?**

2 3



Your COREtec® floor Always fits your style.

stands up to real life, it's engineered for simplicity.



Always fits your style

We have a passion for providing a wide selection of authentic natural looks, so you can express what makes you, you. Persistent in product innovation – including micro-beveled edges, enhanced painted bevels & Embossed in Register technology – we create the most appealing designs & textures available.



Stands up to real life

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all COREtec® floors come with a limited lifetime residential warranty.



Is engineered for simplicity


COREtec® is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.

There's a million reasons to choose COREtec[®], but here's our top 6.

Our floors:

- ✓ Are extremely stable
- ✓ Reduce noise
- ✓ Have superior scratch & stain resistance
- ✓ Do not need to acclimate
- ✓ Are suitable for underfloor heating & cooling
- ✓ Install on any surface

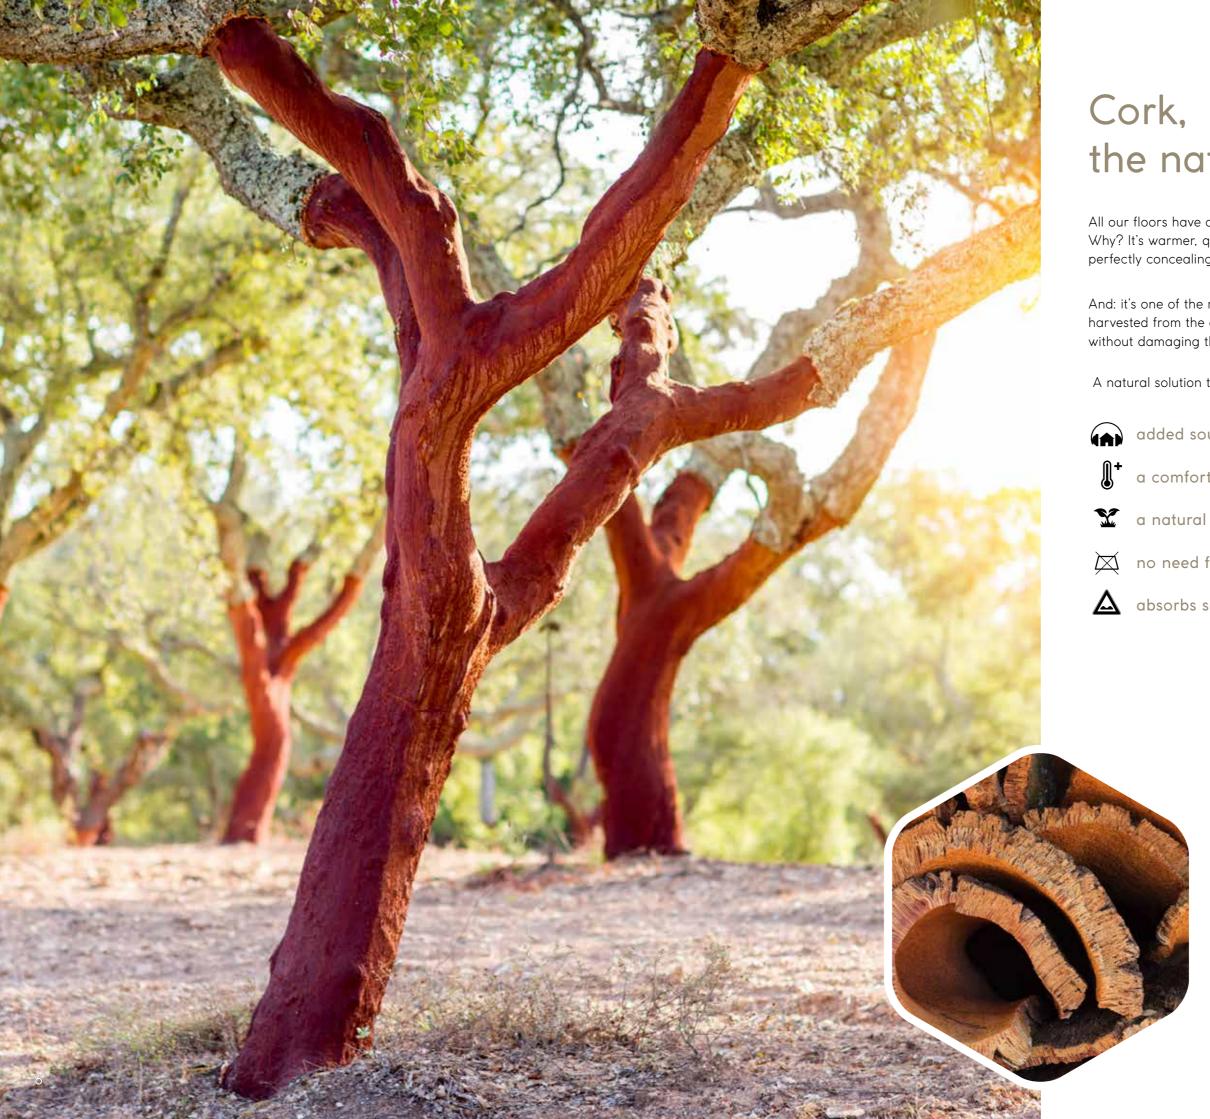

the natural choice

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

A natural solution that brings only benefits to your home or business:

added sound insulation

1 a comfortable and warmer floor

a natural protection against mold & mildew

no need for separate underlayment

a absorbs subfloor imperfections

CERATOUCH is a downright gamechanger

CERATOUCH is one of the latest additions to our range of rigid composite floors. CERATOUCH will unquestionably revolutionize the flooring industry for many years to come. It brings you the best of both worlds: the strength plus look and feel of a ceramic tile combined with the comfort and ease of installation of a soft floor. This collection is available in a large number of designer-curated tile and stone designs.

CERATOUCH is built around a high-density core composed of mineral particles, void of PVC. Its longevity is assured by multiple high-performance layers giving it a scratch resistance equal or better to that of a ceramic tile but without the brittleness of the latter. Accidental breakage during installation is excluded, which is a recurring problem with genuine ceramics.

Laying a CERATOUCH floor is easy and straightforward and thereby offers new and unheard-of opportunities for the renovation market. It can be laid directly on top of an older floor or a slightly uneven surface without print-through.

Thanks to its secure tap angle system, CERATOUCH is self-aligning and does not necessarily need the intervention of a costly and hard to get hold of professional tiler. CERATOUCH is 100% waterproof and its slim, tight seams add to its natural and hyperrealistic look. In commercial applications, tihs collection drastically reduces costly downtime ensuring same-day walk-on.



Advanced CERAGUARD® technology

Ceraguard[®] is a protective stain-, scratch- and scuff resistant thermal resin top layer specifically developed for the CERATOUCH collection. The matte, embossed finish gives the tiles their stunning true-to-nature look and feel and makes it virtually impossible to distinguish from a genuine stone or ceramic floor.





can't spot the difference

Well suited for the project and renovation market

Aside from its residential use, CERATOUCH also offers many advantages for the project and renovation market. There's no need to egalize or even prepare the surface. CERATOUCH adapts to moderate irregularities without print-through and can be installed on top of an existing floor. Handling is easy thanks to its lightweight structure (about half the weight of a ceramic tile). Installation is done by clicking, not gluing. The whole installation process is rapid and straightforward allowing for same-day walk-on, thus avoiding costly downtime.

Enhanced dimensional stability

General and dimensional stability of a CERATOUCH floor is firmly ensured by 2 strong layers of vinyl applied to both sides of the mineral core. As a result, this floor will never bulge nor contract and always keep its original appearance. The inherent CERATOUCH resistance and stabillity is also very welcome when flooring densily visited offices and public or commercial spaces.

CERATOUCH in a nutshell.



Reduces costly downtime, same-day walk-on



Half the weight of a ceramic tile



The look and feel of a genuine ceramic tile



Protective stain-, Scratch- & scuff resistant thermal resin top layer



Requiring minimal cleaning and maintenance




Sustainable through the mineral core, void of PVC and its cork underlayer



Mineral Core®

The unique COREtec® technology, with extra noise reducing technology.

12

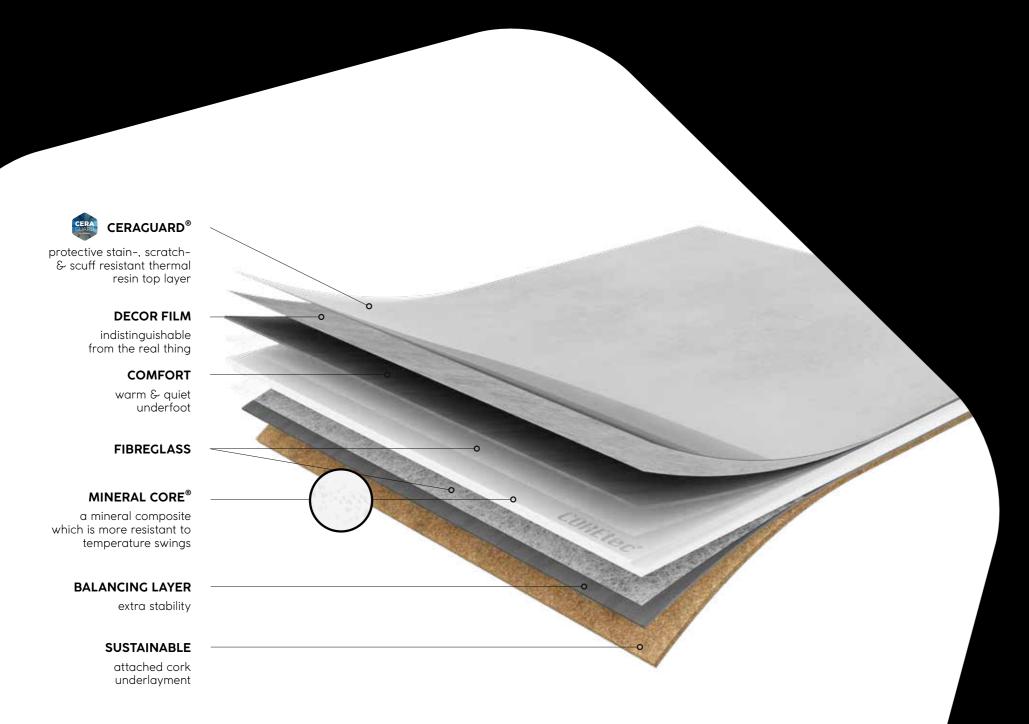



100% Waterproof



Extremely stable



Pet proof



Reduces noise



Easy to install



Installation on any surface



No acclimatisation necessary



Ideal for underfloor heating & cooling

13




Electrostatic performance




Welcome to a new dimension



Discover the exquisite **CERATOUCH** collection

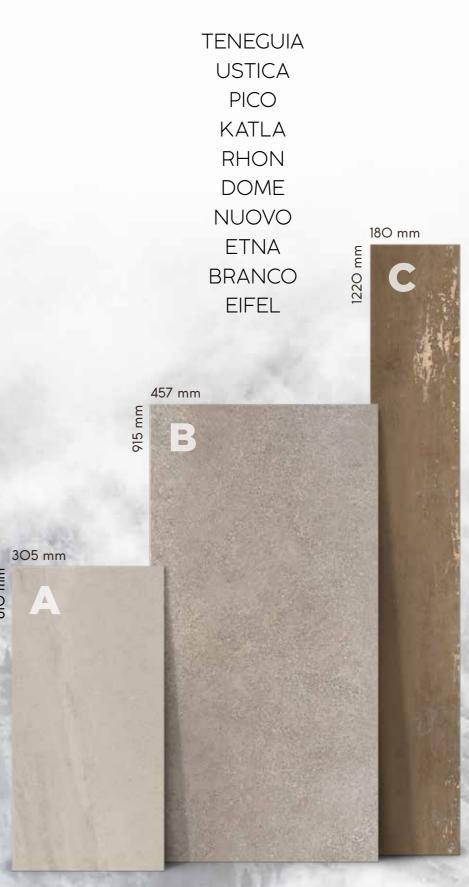

TENEGUIA





50 CERA **0192** B




50 CERA **0190** B




50 CERA **0196** B







USTICA

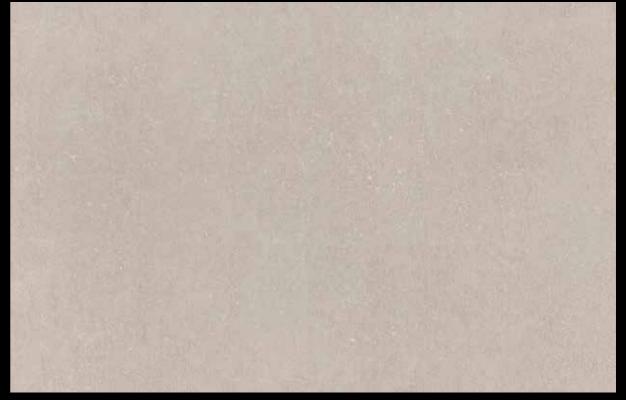


50 CERA **0272** A 50 CERA **0272** B



50 CERA **0293** A 50 CERA **0293** B

PICO







50 CERA **0372** A 50 CERA **0372** B



50 CERA **0393** A 50 CERA **0393** B

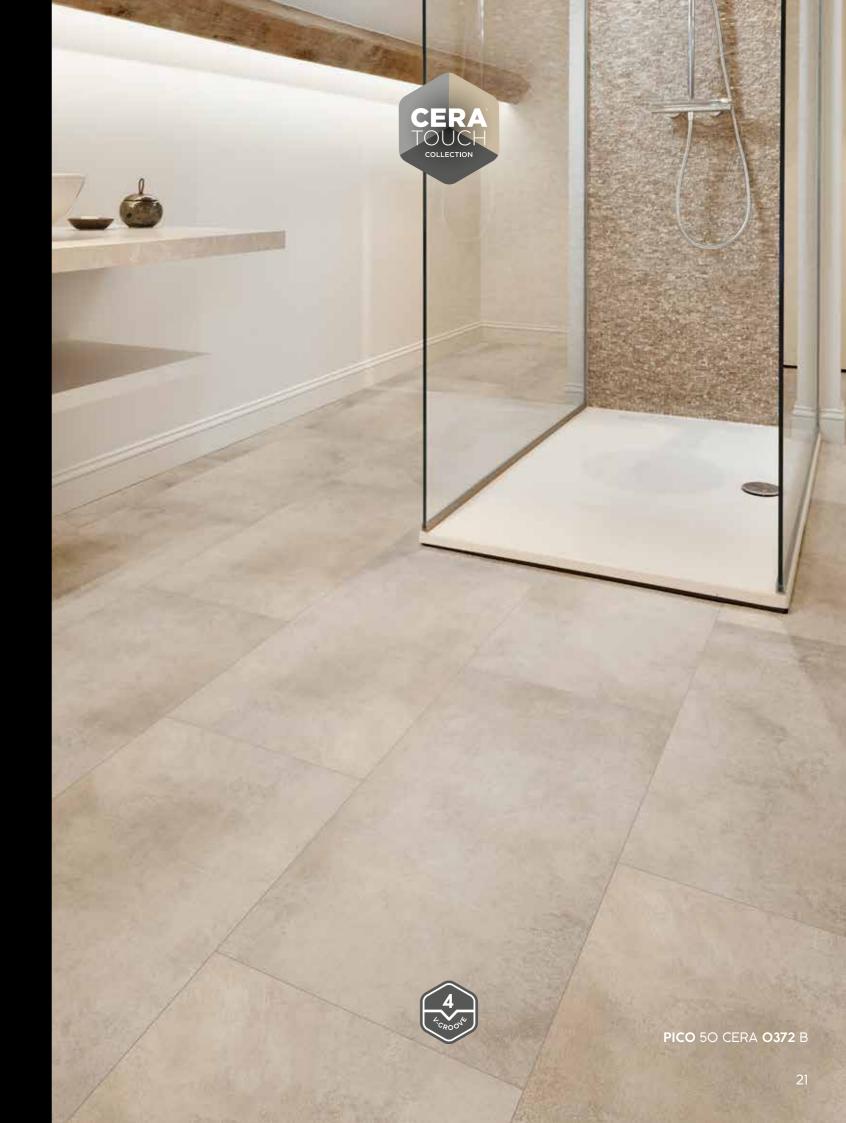





KATLA



50 CERA **0495** B 50 CERA **0495** C




50 CERA **0493** B 50 CERA **0493** C




50 CERA **0471** B 50 CERA **0471** C

RHON








50 CERA **0571** A 50 CERA **0571** B

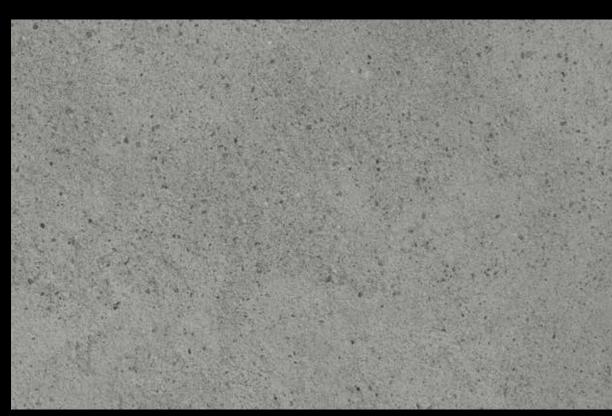

50 CERA **0593** A 50 CERA **0593** B

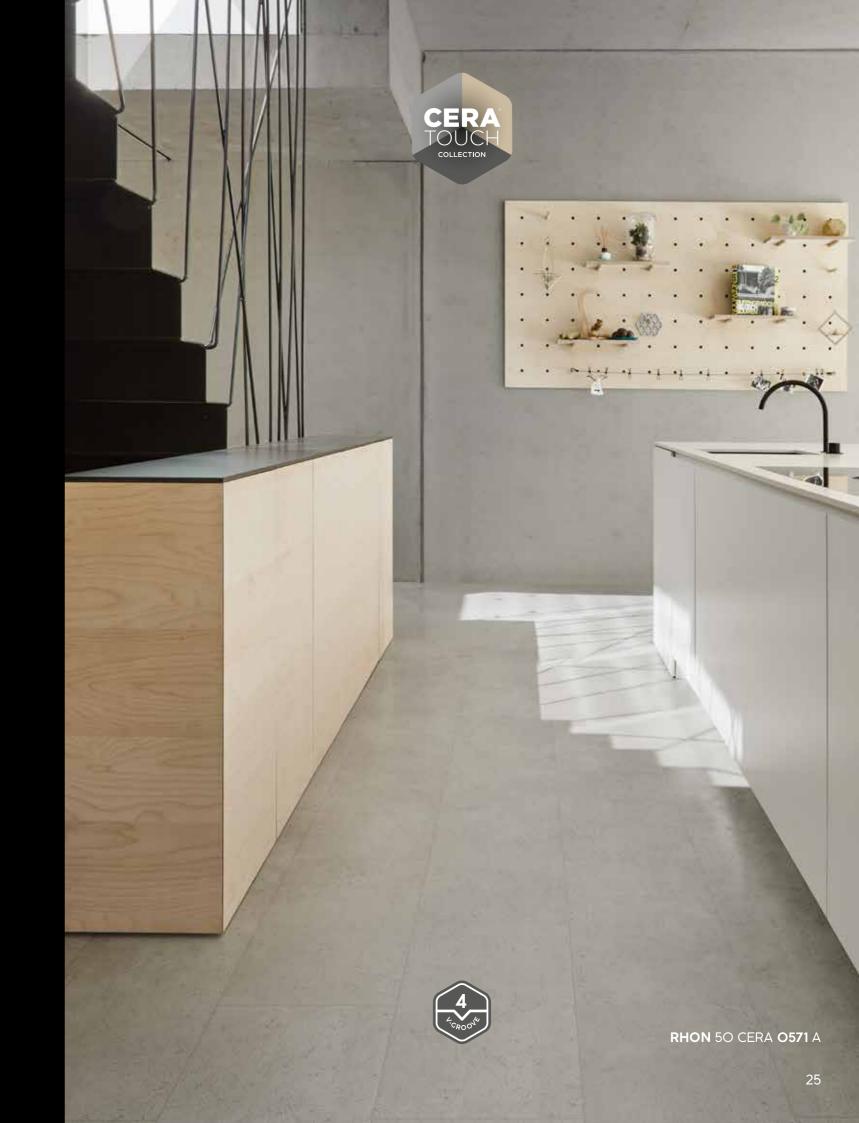

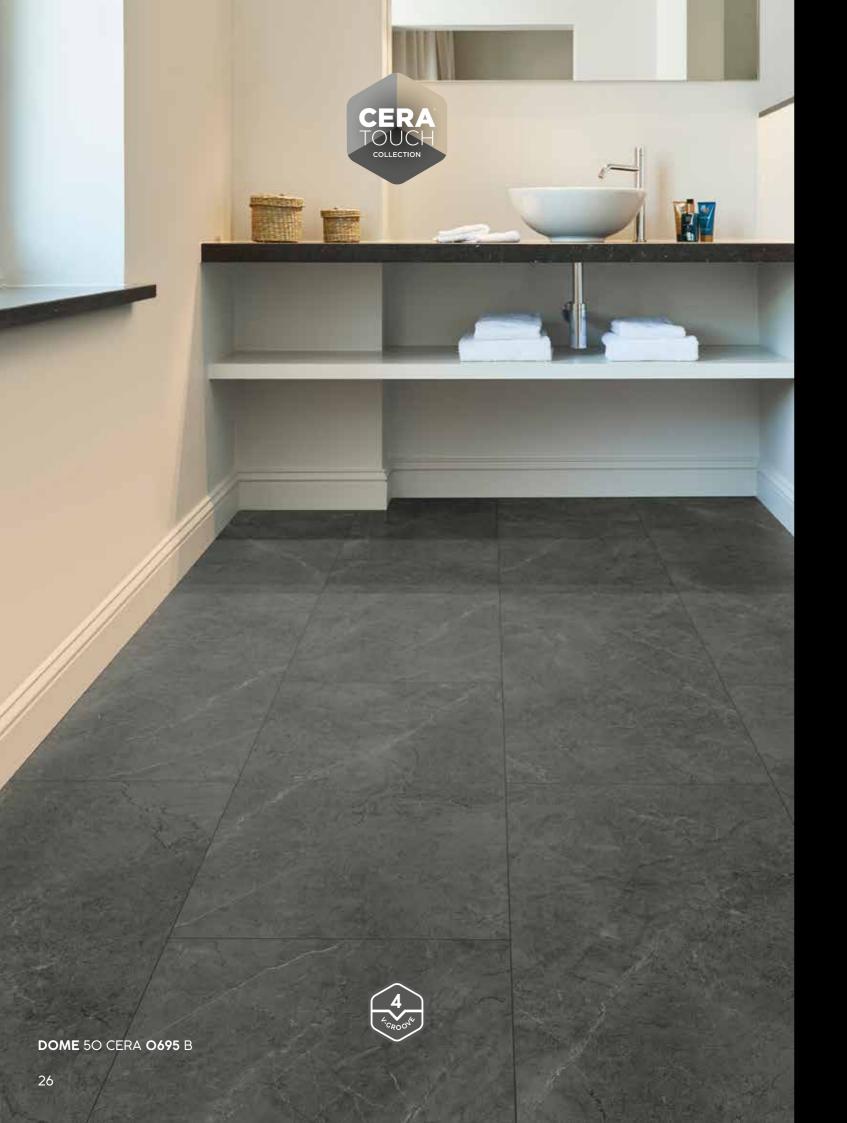



DOME




50 CERA **0671** B



50 CERA **0695** B 50 CERA **0693** B

NUOVO





50 CERA **0795** C





50 CERA **0793** C



50 CERA **0785** C



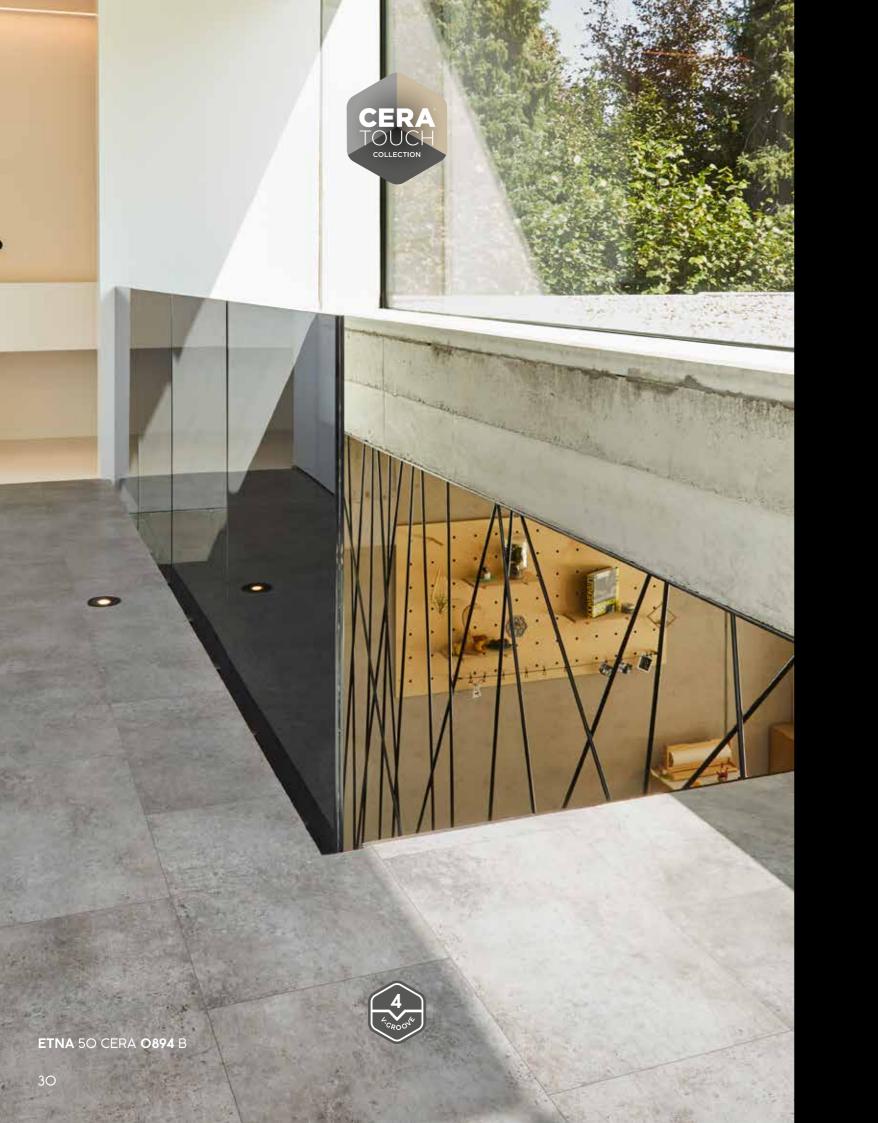



ETNA



50 CERA **0885** B









50 CERA **0893** B

BRANCO






50 CERA **0990** B

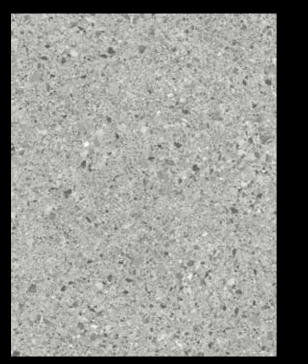




50 CERA **0993** B 50 CERA **0997** B



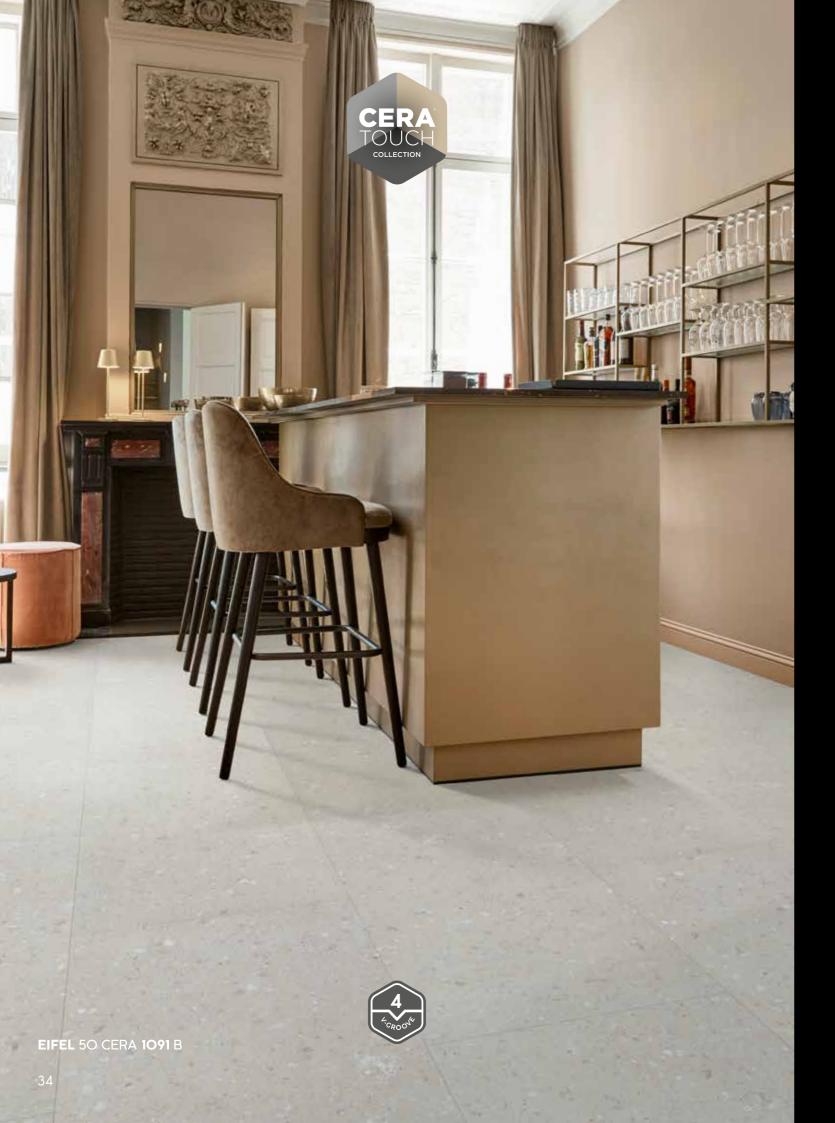



EIFEL



50 CERA **1091** B



50 CERA **1095** B



50 CERA **1097** B

ACCESSORIES

Matching design accessories

Our design accessories match the design of your floor & are also 100% waterproof & shock resistant.









1,8 cm 1,8 cm 2,4 m 70SQR X (.... = matching design ref.)

INSTALLATION



CERATOUCH floors have the easiest install on the market.

Scan the QR code for the installation video or visit our website for more information: www.coretecfloors.com.

MAINTENANCE

The COREtec® Clean, quick & green kit:

- Daily cleanerDeep cleaner
- · Stain remover







TECHNICAL SPECIFICATIONS



610 x 305 mm

915 x 457 mm

1220 x 180 mm



2,04 m² - 11 tiles ±23 kg/box

2,09 m² - 5 tiles ±24 kg/box

1,98 m² - 9 tiles ±22 kg/box



8.00 mm

8.00 mm

8.00 mm



4V GROOVE ON THE COMPLETE COLLECTION



CERAGUARD PROTECTIVE STAIN-, SCRATCH-& SCUFF RESISTANT
THERMAL RESIN TOP LAYER

Level of use

Classe 23 / 34 (EN ISO 10874)

Geometrical characteristics

Conform (EN 17539)

Wear resistance

Pass 4 000 cycles (ISO 24338)

Castor chair resistance

Pass 25 000 cycles (EN 425)

Effect of furniture Leg

No visible change (EN 16581)

Residual indentation

≤ 0.15 mm (EN ISO 24343-1)

Resistance to staining

5 (no visible change) (EN 438-2)

Locking strength

LS 2 2.0 / SS 2 3.5 (EN 24334)

Dimensional stability

Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light

> grade 6 (EN ISO 105-B-02)

Impact sound reduction

 $\Delta Lw = 18 \text{ dB} \text{ (ISO 10140-3 / EN 717-2)}$

Formaldehyde Emission Class

E1 (EN 717-1)

Fire classification Bfl - S1 (EN 13501)

Slip resistance

DS - R1O (EN 13893 / DIN 51130)

Underfloor heating


Suitable

Electrostatic performance

≤ 2 kV (EN 1815)

Thermal Resistance

O.O295 m²-K/W

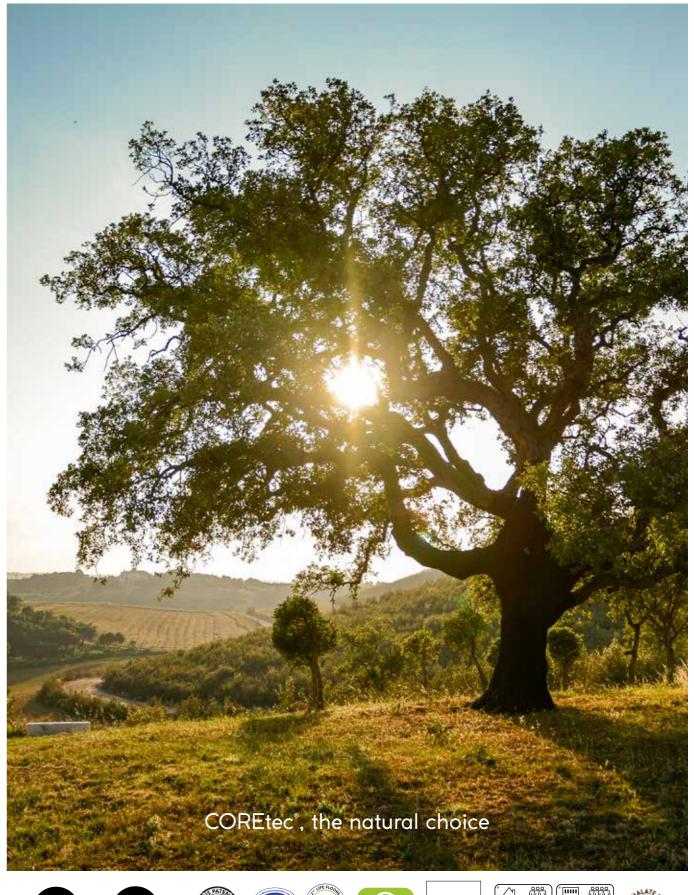



RESIDENTIAL



COMMERCIAL



















39



38

